




MONITOR CHAMBER

General

The monitor ionization chamber type 70 422 has been developed as a shadow free sensor for x-ray beams. It can be used for measurements of the tube output and its stability. Its stainless steel housing makes the chamber very robust in harsh operating conditions.

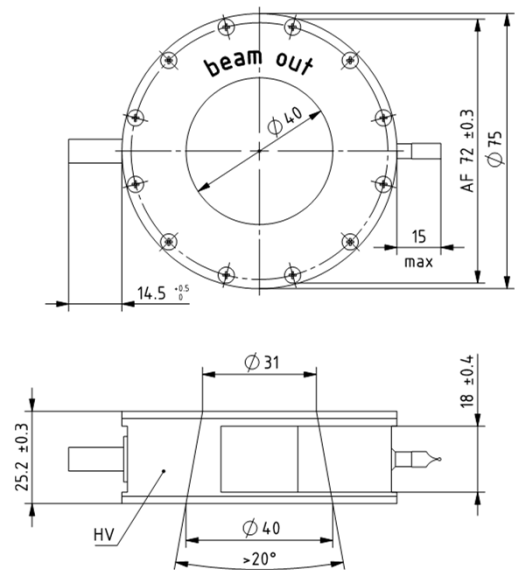

Key facts

Filling gas	Window	Total beam filtration	Connector	High voltage
Noble gases e.g. Argon	Aluminum	250 µm Al	LEMO	on housing insulated installation

